



D-Link DSL 2650u



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il

Step 1: **Connect to the Router**

To access the web user interface, open a web-browser such as Internet Explorer and enter the IP address of the router (**10.0.0.138**) into the address bar and press the Enter key on your keyboard



Username: Admin

Password: Admin





Choose **Advanced Setup** from Left Sidebar, Then Click **Wan Service**



Click **Edit** on the First Option **PPPoE_0_8_48**

Click **Next**

Click **Next**



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



Fill In The Username And Password In The **PPP Username** And **PPP Password** Field.

The screenshot shows the D-Link router's configuration interface. On the left is a navigation menu with categories like Device Info, Advanced Setup, WAN, LAN, NAT, Security, Quality of Service, Routing, DNS, DSL, Print Server, Port Mapping, PPTP, Samba Config, Wireless, Diagnostics, and Management. The main content area is titled "PPP Username and Password" and includes a descriptive paragraph: "PPP usually requires that you have a user name and password that your ISP has provided to you." Below this are several input fields: "PPP Username:" with the value "user@099", "PPP Password:" with masked characters "*****", "PPPoE Service Name:" (empty), and "Authentication Method:" set to "AUTO" with a dropdown arrow. There are also three checkboxes: "Enable NAT" (checked), "Enable Firewall" (unchecked), and "Obtain default gateway automatically" (selected with a radio button). The last option is "Use the following default gateway:" with an unselected radio button.



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



Click **Next 3** Times.

The screenshot shows the D-Link router's configuration interface. On the left is a navigation menu with categories like Device Info, Advanced Setup, WAN, LAN, NAT, Security, Quality of Service, Routing, DNS, DSL, Print Server, Port Mapping, PPTP, Samba Config, Wireless, Diagnostics, and Management. The main area is titled 'Advanced Setup' and contains the following settings:

- Obtain default gateway automatically
- Use the following default gateway:
 - Use IP Address: []
 - Use WAN Interface: pppoe_0_8_48_1/ppp_0_8_48_1
- PPP IP extension
- Advanced DMZ
 - Non DMZ IP Address: 192.168.2.1
 - Non DMZ Net Mask: 255.255.255.0
- Keep alive PPP connection
- Dial on demand (with idle timeout timer)
- Use Static IP Address
- Retry PPP password on authentication error
- Enable PPP Debug Mode
- Bridge PPPoE Frames Between WAN and Local Ports (Default Enabled)

At the bottom right, there are 'Back' and 'Next' buttons. The 'Next' button is highlighted with a red box.

Then **Apply**

Reboot



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il




D-Link

Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DSL
Print Server
Port Mapping
PPTP
Samba Config
Wireless
Diagnostics
Management

DSL Router Reboot

The DSL Router has been configured and is rebooting.

Progress bar showing approximately 50% completion.

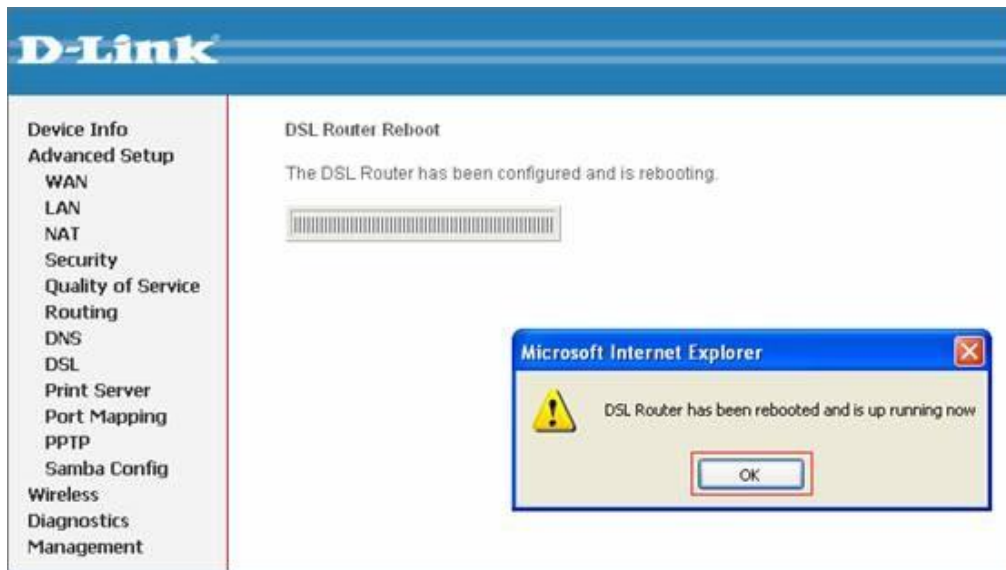

D-Link

Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DSL
Print Server
Port Mapping
PPTP
Samba Config
Wireless
Diagnostics
Management

DSL Router Reboot

The DSL Router has been configured and is rebooting.

Progress bar showing 100% completion.

Microsoft Internet Explorer

! DSL Router has been rebooted and is up running now

OK