



## D-Link DSL 2650u



**Primo Telecommunication**

072-2467000 | [support@099.net.i](mailto:support@099.net.i) | [www.099.net.il](http://www.099.net.il)

## Step 1: **Connect to the Router**

To access the web user interface, open a web-browser such as Internet Explorer and enter the IP address of the router (**10.0.0.138**) into the address bar and press the Enter key on your keyboard



**Username:** Admin

**Password:** Admin





Choose **Advanced Setup** from Left Sidebar, Then Click **Wan Service**



Click **Edit** on the First Option **PPPoE\_0\_8\_48**

Click **Next**

Click **Next**



**Primo Telecommunication**

072-2467000 | support@099.net.i | www.099.net.il



Fill In The Username And Password In The **PPP Username** And **PPP Password** Field.

The screenshot shows the D-Link web interface for configuring PPP settings. The left sidebar contains a navigation menu with the following items: Device Info, Advanced Setup, WAN, LAN, NAT, Security, Quality of Service, Routing, DNS, DSL, Print Server, Port Mapping, PPTP, Samba Config, Wireless, Diagnostics, and Management. The main content area is titled "PPP Username and Password" and includes the following fields and options:

- PPP Username: user@099
- PPP Password: .....
- PPPoE Service Name: (empty field)
- Authentication Method: AUTO (dropdown menu)
- Enable NAT
- Enable Firewall
- Obtain default gateway automatically
- Use the following default gateway:



**Primo Telecommunication**

072-2467000 | support@099.net.i | www.099.net.il



Click **Next 3** Times.

The screenshot shows the D-Link router's configuration interface. On the left is a navigation menu with categories: Device Info, Advanced Setup, WAN, LAN, NAT, Security, Quality of Service, Routing, DNS, DSL, Print Server, Port Mapping, PPTP, Samba Config, Wireless, Diagnostics, and Management. The main content area is titled 'Advanced Setup' and contains the following settings:

- Obtain default gateway automatically
- Use the following default gateway:
  - Use IP Address: [ ]
  - Use WAN Interface: pppoe\_0\_8\_48\_1/ppp\_0\_8\_48\_1
- PPP IP extension
- Advanced DMZ
  - Non DMZ IP Address: 192.168.2.1
  - Non DMZ Net Mask: 255.255.255.0
- Keep alive PPP connection
- Dial on demand (with idle timeout timer)
- Use Static IP Address
- Retry PPP password on authentication error
- Enable PPP Debug Mode
- Bridge PPPoE Frames Between WAN and Local Ports (Default Enabled)

At the bottom right of the configuration area are two buttons: 'Back' and 'Next', with the 'Next' button highlighted by a red box.

Then **Apply**

**Reboot**



**Primo Telecommunication**

072-2467000 | support@099.net.i | www.099.net.il




**D-Link**

Device Info  
Advanced Setup  
WAN  
LAN  
NAT  
Security  
Quality of Service  
Routing  
DNS  
DSL  
Print Server  
Port Mapping  
PPTP  
Samba Config  
Wireless  
Diagnostics  
Management

**DSL Router Reboot**

The DSL Router has been configured and is rebooting.

Progress bar showing approximately 50% completion.

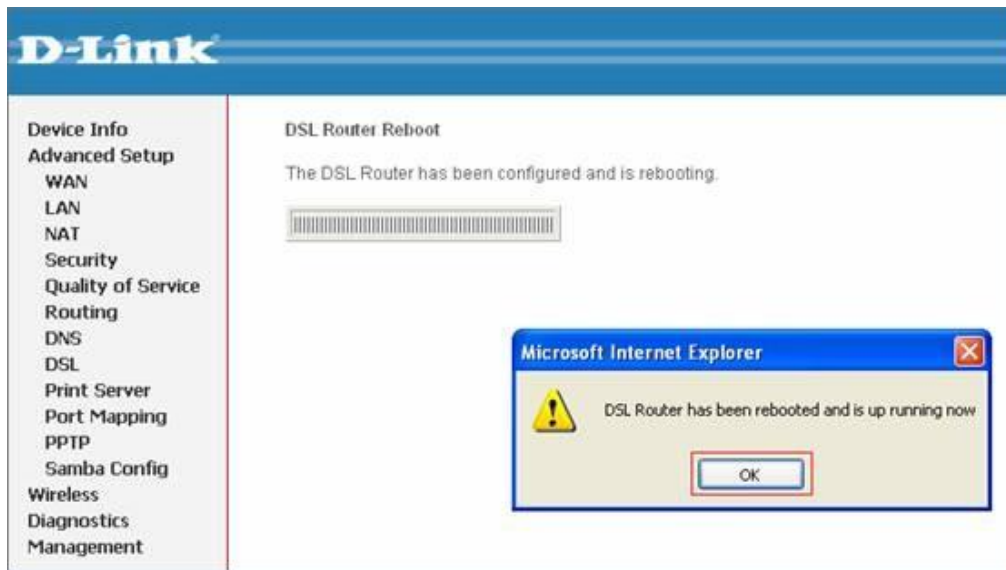

**D-Link**

Device Info  
Advanced Setup  
WAN  
LAN  
NAT  
Security  
Quality of Service  
Routing  
DNS  
DSL  
Print Server  
Port Mapping  
PPTP  
Samba Config  
Wireless  
Diagnostics  
Management

**DSL Router Reboot**

The DSL Router has been configured and is rebooting.

Progress bar showing 100% completion.

**Microsoft Internet Explorer**

! DSL Router has been rebooted and is up running now

OK