



D-Link DSL 6740U



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il

Connect to the Router

To access the web user interface, open a web-browser such as Internet Explorer and enter the IP address of the router (**10.0.0.138**) into the address bar and press the Enter key on your keyboard



Username: Admin

Password: Admin





Then Go To Either **Wan Service** Or **Internet Setup** As Shown Below And Select **PPPoE Wan:**

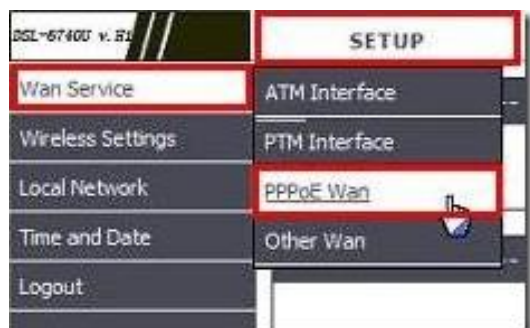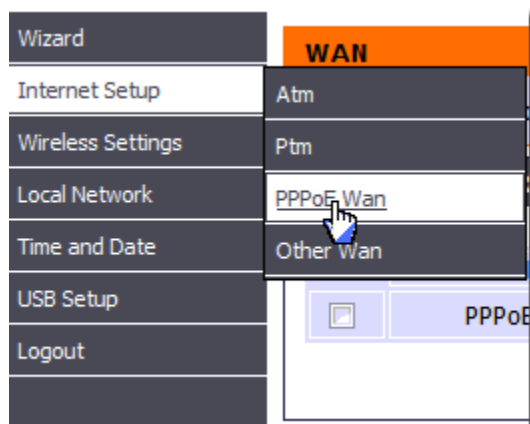

Then **Edit** pppoe **_0_8_48**



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



Site Map Firmware Version: BZ_1.01.15
Build Timestamp: 06052012

D-Link

DSL-6740G v. BZ

SETUP ADVANCED MAINTENANCE STATUS HELP

Wan Service
Wireless Settings
Local Network
Time and Date
Logout

WAN SERVICE

Choose Add, or Remove to configure a WAN service over a selected interface.

WIDE AREA NETWORK (WAN) SERVICE SETUP

Service Name	Layer2 Interfaces	Igmp	NAT	Firewall	Remove	Edit
pppoe_0_8_48	atm0/(0_8_48),ptm0/(0_1_1)	Disabled	Enabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



Type In **Username** And **Password**

Site Map Firmware Version: BZ_1.01.15
Build Timestamp: 06052012

D-Link

DGL-6740U v. B1

SETUP ADVANCED MAINTENANCE STATUS HELP

Wan Service
Wireless Settings
Local Network
Time and Date
Logout

PPP USERNAME AND PASSWORD

PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided to you.

CONFIGURATION

PPP Username:

PPP Password:

PPPoE Service Name:

Authentication Method:

Enable Fullcone NAT:

Dial on demand (with idle timeout timer):

Use Static IPv4 Address:

Enable PPP Debug Mode:

Bridge PPPoE Frames Between WAN and Local Ports:

Multicast Proxy:

Enable IGMP Multicast Proxy:



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



Site Map Firmware Version: BZ_1.01.15
Build Timestamp: 06052012

D-Link

DGL-6710G v. B1

- SETUP
- ADVANCED
- MAINTENANCE
- STATUS
- HELP

Wan Service

Wireless Settings

Local Network

Time and Date

Logout

WAN SETUP - SUMMARY

Make sure that the settings below match the settings provided by your ISP.
Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

SYSTEM INFO

Connection Type:	PPPoE
NAT:	Enabled
Full Cone NAT:	Disabled
Firewall:	Enabled
IGMP Multicast:	Disabled
Quality Of Service:	Disabled

Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il