

D-Link DSL 6740U





לאחר כניסה אל הדפדפן הקלידו את הכתובת הבאה: **10.0.0.138** בשורת הכתובות. בחלון שייפתח הקלידו בתבנית **שם המשתמש**

Admin

ובתבנית הסימא

Admin



הכנסו אל

Wan Service

או ל


Internet Setup

תלוי בגרסת הראוטר.



Primo Telecommunication

072-2467000 | support@099.net.il | www.099.net.il

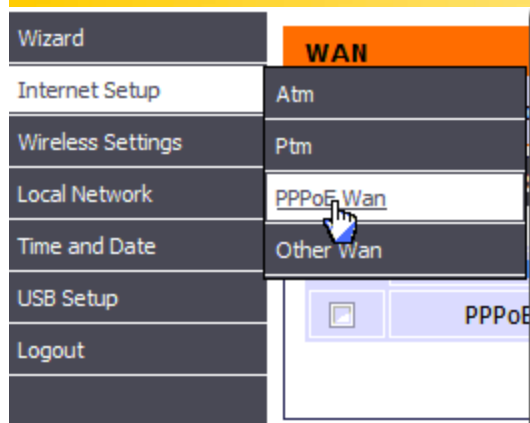

הקליקו על כפתור

Edit



Site Map Firmware Version: BZ_1.01.15
Build Timestamp: 06052012

D-Link

002-67100 v. 02

Wan Service
Wireless Settings
Local Network
Time and Date
Logout

SETUP ADVANCED MAINTENANCE STATUS HELP

WAN SERVICE

Choose Add, or Remove to configure a WAN service over a selected interface.

WIDE AREA NETWORK (WAN) SERVICE SETUP

Service Name	Layer2 Interfaces	Igmp	NAT	Firewall	Remove	Edit
pppoe_0_8_48	atm0/(0_8_48),ptm0/(0_1_1)	Disabled	Enabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>

הקלידו את **שם המשתמש** שלכם ולאחריו את הסימון

@099

הקלידו את סיסמתכם ולאחר מכן הקליקו על

Next



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



Site Map Firmware Version: BZ_1.01.15
Build Timestamp: 060520 12

D-Link

DSL-6740G v. B1

SETUP

ADVANCED

MAINTENANCE

STATUS

HELP

Wan Service

Wireless Settings

Local Network

Time and Date

Logout

PPP USERNAME AND PASSWORD

PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided to you.

CONFIGURATION

PPP Username: user@099

PPP Password:

PPPoE Service Name:

Authentication Method: AUTO

Enable Fullcone NAT:

Dial on demand (with idle timeout timer):

Use Static IPv4 Address:

Enable PPP Debug Mode:

Bridge PPPoE Frames Between WAN and Local Ports:

Multicast Proxy:

Enable IGMP Multicast Proxy:

Back

Next

וודאו כי ההגדרות המופיעות בתמונה תואמות את ההגדרות במחשבכם והקליקו על כפתור

Apply/Save



Primo Telecommunication

072-2467000 | support@099.net.il | www.099.net.il



Site Map Firmware Version: BZ_1.01.15
Build Timestamp: 06052012

D-Link

DSL-6740E v.B2

SETUP ADVANCED MAINTENANCE STATUS HELP

Wan Service -
Wireless Settings
Local Network
Time and Date
Logout

WAN SETUP - SUMMARY

Make sure that the settings below match the settings provided by your ISP.
Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

SYSTEM INFO

Connection Type:	PPPoE
NAT:	Enabled
Full Cone NAT:	Disabled
Firewall:	Enabled
IGMP Multicast:	Disabled
Quality Of Service:	Disabled

Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

כעת הראוטר מותקן בהצלחה על מחשבכם



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il

הגדרות רשת אלחוטית :

DSL-6740B	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Wizard	WIRELESS SETTINGS -- WIRELESS BASICS				
Internet Setup	Configure your wireless basic settings.				
Wireless Settings	<input type="button" value="Wireless Basics"/>				1
Local Network	WIRELESS SETTINGS -- WIRELESS SECURITY				
Time and Date	Configure your wireless security settings.				
Logout	<input type="button" value="Wireless security"/>				2

יש לבחור את האפשרות הראשונה :

1

WIRELESS NETWORK SETTINGS

Enable Wireless
 Hide Access Point
 Clients Isolation
 Disable WMM Advertise

SSID:
 BSSID: 00:1A:2B:66:4D:BC
 Country:
 Max Clients:

← הגדרת שם רשת אלחוטי

Wireless - Guest/Virtual Access Points:

Enabled	SSID	Hidden	Isolate Clients	Disable WMM Advertise	Max Clients	BSSID
<input type="checkbox"/>	wl0_Guest1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A
<input type="checkbox"/>	wl0_Guest2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A
<input type="checkbox"/>	wl0_Guest3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A


Please take note of your SSID and security Key as you will need to duplicate the same settings to your wireless devices and PC.

← שמור


כדי לאבטח הרשת האלחוטית לבחור wireless security :

MANUAL SETUP AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the encryption strength.


Select SSID: test1234  לבחור רשת

Network Authentication: WPA-PSK

WPA Pre-Shared Key: ●●●●●●●● [Click here to display](#)  לכתוב הסיסמה

WPA Group Rekey Interval: 0

WPA Encryption: TKIP

Please take note of your SSID and security Key as you will need to duplicate the same settings to your wireless devices and PC.  שמור

Save/Apply