

D-Link DSL 7850U



לאחר כניסה אל הדפדפן הקלידו את הכתובת הבאה: **10.0.0.138** בשורת הכתובות. בחלון שייפתח הקלידו בתבנית **שם המשתמש**

Admin

ובתבנית הסימא

Admin







הכנסו אל

Wan Service

או ל

Internet Setup

תלוי בגרסת הראוטר.

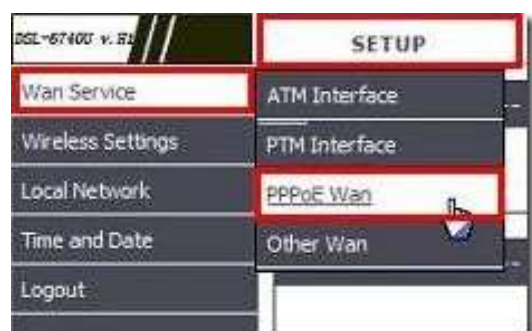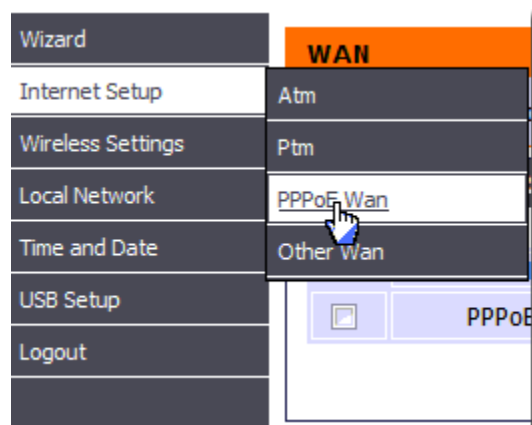


הקליקו על כפתור

Edit



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



The screenshot shows the D-Link web interface for WAN Service Setup. The top navigation bar includes 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists 'Wan Service', 'Wireless Settings', 'Local Network', 'Time and Date', and 'Logout'. The main content area is titled 'WAN SERVICE' and contains the following text: 'Choose Add, or Remove to configure a WAN service over a selected interface.' Below this is a section titled 'WIDE AREA NETWORK (WAN) SERVICE SETUP' containing a table with the following data:

Service Name	Layer2 Interfaces	Igmp	NAT	Firewall	Remove	Edit
pppoe_0_8_48	atm0/(0_8_48),ptm0/(0_1_1)	Disabled	Enabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>

Below the table are 'Add' and 'Remove' buttons. The 'Edit' button in the table is highlighted with a red box.

הקלידו את **שם המשתמש** שלכם ולאחריו את הסיימות

@099

הקלידו את סיסמתכם ולאחר מכן הקליקו על

Next



- DSL-6740G v. B1
- Wan Service
- Wireless Settings
- Local Network
- Time and Date
- Logout

- SETUP
- ADVANCED
- MAINTENANCE
- STATUS
- HELP

PPP USERNAME AND PASSWORD

PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided to you.

CONFIGURATION

PPP Username:

PPP Password:

PPPoE Service Name:

Authentication Method:

Enable Fullcone NAT:

Dial on demand (with idle timeout timer):

Use Static IPv4 Address:

Enable PPP Debug Mode:

Bridge PPPoE Frames Between WAN and Local Ports:

Multicast Proxy:

Enable IGMP Multicast Proxy:



Primo Telecommunication

072-2467000 | support@099.net.il | www.099.net.il



וודאו כי ההגדרות המופיעות בתמונה תואמות את ההגדרות במחשבכם והקליקו על כפתור

Apply/Save

The screenshot shows the D-Link web interface for WAN Setup. The top navigation bar includes 'Site Map', 'Firmware Version: BZ_1.01.15', and 'Build Timestamp: 06052012'. The main header features the 'D-Link' logo. A sidebar on the left lists navigation options: 'Wan Service', 'Wireless Settings', 'Local Network', 'Time and Date', and 'Logout'. The main content area is titled 'WAN SETUP - SUMMARY' and contains the following text: 'Make sure that the settings below match the settings provided by your ISP. Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.' Below this is a 'SYSTEM INFO' section with a table of settings:

Connection Type:	PPPoE
NAT:	Enabled
Full Cone NAT:	Disabled
Firewall:	Enabled
IGMP Multicast:	Disabled
Quality Of Service:	Disabled

At the bottom of the settings table, there are two buttons: 'Back' and 'Apply/Save'. Below the buttons, a note states: 'Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.'

כעת הראוטר מותקן בהצלחה על מחשבכם




Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il

הגדרות רשת אלחוטית :

לביצוע שינויים בהגדרת שם הרשת האלחוטית יש לבחור במסך זה ב Wireless 2.4G - G2.4

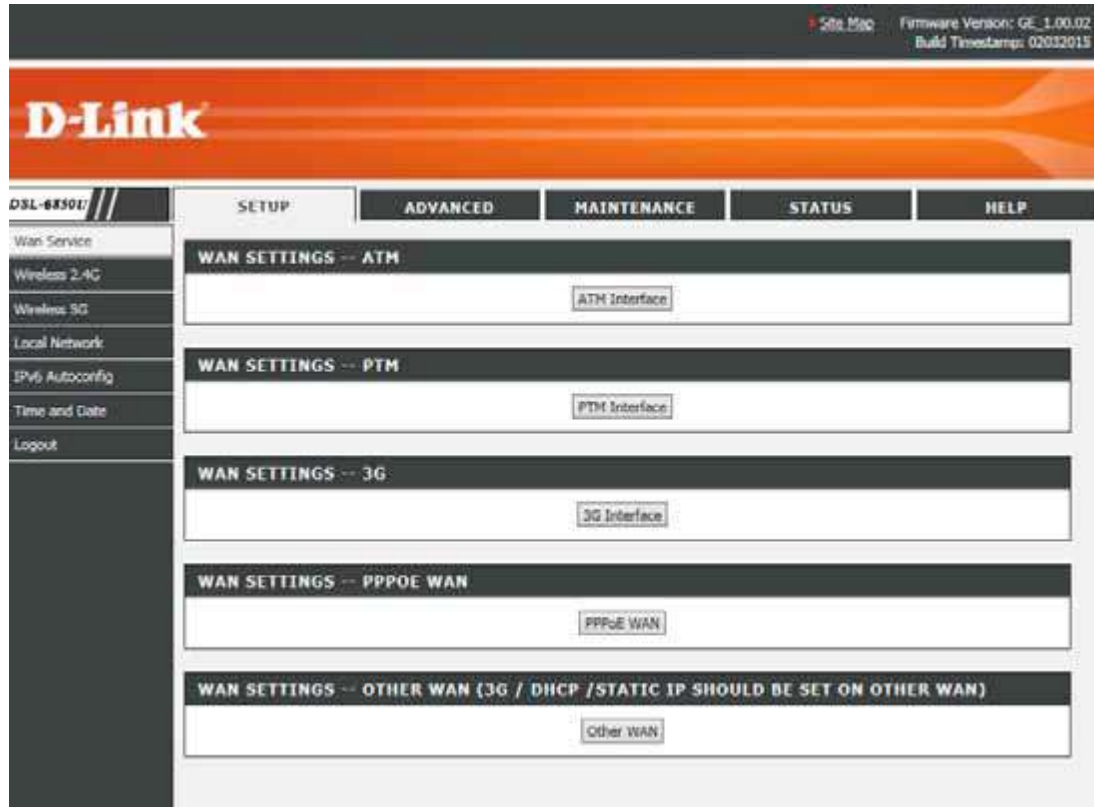

The screenshot shows the D-Link web interface for a DSL-G550T router. The top navigation bar includes 'D-Link' and a menu with 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'ADVANCED' tab is selected. On the left, a sidebar menu lists 'Wan Service', 'Wireless 2.4G', 'Wireless 5G', 'Local Network', 'IPv6 Autoconfig', 'Time and Date', and 'Logout'. The main content area displays 'WAN SETTINGS' for five different interfaces: ATM, PTM, 3G, PPPOE WAN, and OTHER WAN (3G / DHCP / STATIC IP SHOULD BE SET ON OTHER WAN). Each interface has a corresponding 'Interface' button.

שם הרשת האלחוטית שלך יוצג במחשב בעת חיפוש והתחברות לרשתות אלחוטיות

שימו לב שכעת ניתן לגלוש, אך ניתן לשנות את השם של הרשת האלחוטית SSID על מנת לשנות את סיסמת הרשת האלחוטית יש לעבור למסך Advanced ולבחור ב Wireless 2.4G - Advanced ובתוכו לבחור ב

- Advanced Wireless – Security Settings



WIRELESS BASICS

- Enable Wireless**
- Hide Access Point**
- Clients Isolation**
- Disable WMM Advertise**
- Enable Wireless Multicast Forwarding (WMF)**

SSID:

BSSID: 70:62:B8:30:CA:BE

Country:

Max Clients:

Wireless - Guest/Virtual Access Points:

Enabled	SSID	Hidden	Isolate Clients	Max Clients	BSSID
<input checked="" type="checkbox"/>	Sogi	<input checked="" type="checkbox"/>	<input type="checkbox"/>	5	62:62:B8:30:CA:BF
<input type="checkbox"/>	wl0_Guest2	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A
<input type="checkbox"/>	wl0_Guest3	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A

[Site Map](#) Firmware Version: GE_1.00.02
Build Timestamp: 02032015



DSL-6850U

SETUP

ADVANCED

MAINTENANCE

STATUS

HELP

Advanced Wireless 2.4G

Advanced Wireless 5G

Port Forwarding

Port Triggering

DMZ

Parental Control

Filtering Options

DNS

Dynamic DNS

Network Tools

Routing

DLNA

Storage Service

IP Tunnel

Print Server

Samba

Logout

ADVANCED WIRELESS -- ADVANCED SETTINGS

Allows you to configure advanced features of the wireless LAN interface.

[Advanced Settings](#)

ADVANCED WIRELESS -- MAC FILTERING

Allows you to configure wireless firewall by denying or allowing designated MAC addresses.

[MAC Filtering](#)

ADVANCED WIRELESS -- SECURITY SETTINGS

Allows you to configure security features of the wireless LAN interface.

[Security Settings](#)

ADVANCED WIRELESS -- STATION INFO

This page shows authenticated wireless stations and their status.

[Station Info](#)



Primo Telecommunication

072-2467000 | support@099.net.il | www.099.net.il



את סיסמת הרשת האלחוטית ניתן לשנות בשדה
.WPA/WAPI

MANUAL SETUP AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the encryption strength.
Click "Apply/Save" when done.

Select SSID :	012 2.4	▼
Network Authentication :	WPA2-PSK	▼
WPA/WAPI passphrase :	●●●●●●●●	Click here to display
WPA Group Rekey Interval :	0	
WPA Encryption :	AES	▼
WFP Encryption :	Disabled	▼



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il