


VTECH NB403





יש להיכנס אל הדפדפן ולהקליד את הכתובת :



שם המשתמש :

admin

סיסמה :

admin

099
NET.IL

STATUS HELP

Username: Admin Password: ***** Login

Login to access more configuration options.

Welcome to the Tilgin router

Status summary

Product name: NB403
Software family: HG126x
Software revision: DSx340-02_07_00_74c_No_w
ISP: Online
Local time: Mon 11 May 2015 01:30:31 PM GMT
System uptime: 11 minutes

Storage devices

No storage devices.

WLAN status

Online BEZEQINT-1b99 MIXED_WPA_WPA2

LAN clients

Please, log in to see the list.



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



יש ללחוץ על

SETUP

ולאחר מכן בשורה של

Wan Setup

מצד שמאל יש ללחוץ על **Connections**

The screenshot shows the router's configuration interface. At the top, there is a navigation bar with the 099 logo and the text 'בזק בינלאומי'. The user is logged in as Admin. The main menu includes 'SETUP', 'ADVANCED', 'WIRELESS', 'TOOLS', 'STATUS', 'STORAGE', and 'HELP'. The left sidebar shows 'WAN Setup' with 'Connections' highlighted, and 'LAN Setup' with 'LAN configuration' and 'Firewall/NAT services'. The main content area is titled 'Connections' and shows a table of 'Available connections'.

Name	Enabled	Status	Uptime	Port	Type	IP address	Description	Delete
vdsl_ipv4	<input checked="" type="checkbox"/>	Online	24 minutes	PTM over DSL	PPPoE	79.182.99.133		<input type="checkbox"/>
adsl_ipv4	<input checked="" type="checkbox"/>	N/A	0 seconds	ATM over DSL	PPPoE	N/A		<input type="checkbox"/>

Buttons:

New connection

Name:

Port / Type:

Description:

Buttons:



Primo Telecommunication


072-2467000 | support@099.net.il | www.099.net.il

ש לבחור את האפשרות הראשונה או להוסיף חיבור

חדש PPPoE

יש לחפש את הקטגוריה

PPPoE

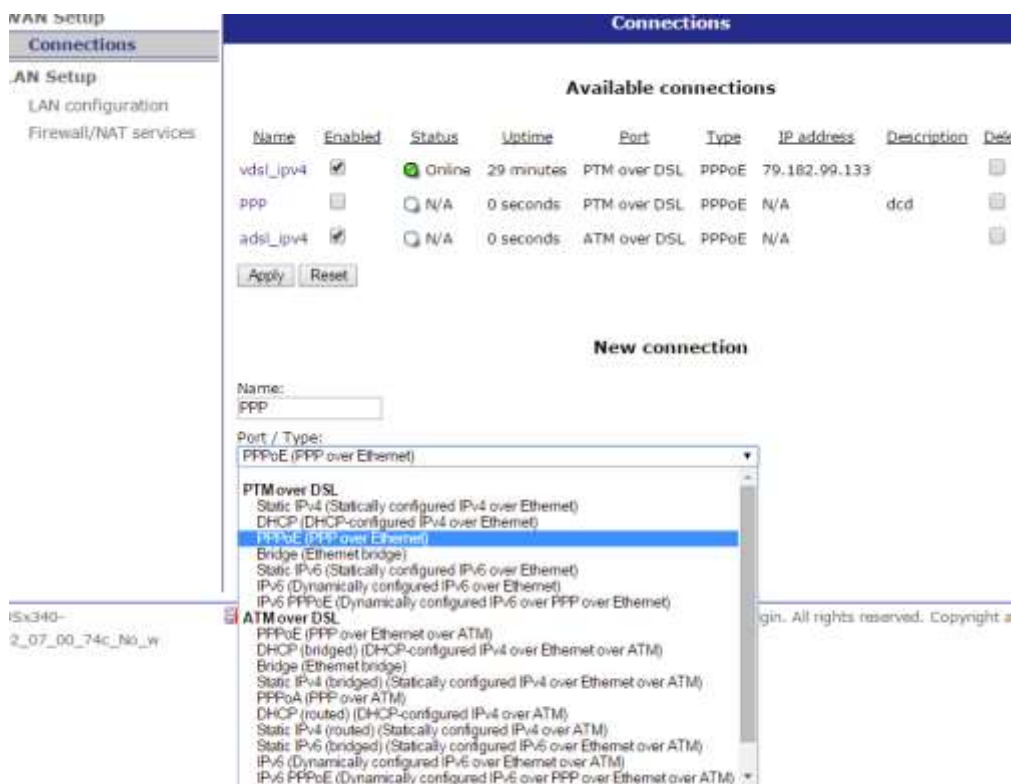

Connections

Available connections

Name	Enabled	Status	Uptime	Port	Type	IP address	Description	Del
vdsi_ipv4	<input checked="" type="checkbox"/>	Online	29 minutes	PTM over DSL	PPPoE	79.162.99.133		
ppp	<input type="checkbox"/>	N/A	0 seconds	PTM over DSL	PPPoE	N/A	dcd	
adsl_ipv4	<input checked="" type="checkbox"/>	N/A	0 seconds	ATM over DSL	PPPoE	N/A		

New connection

Name:

Port / Type:

- PPPoE (PPP over Ethernet)
- PTM over DSL**
 - Static IPv4 (Statically configured IPv4 over Ethernet)
 - DHCP (DHCP-configured IPv4 over Ethernet)
 - PPPoE (PPP over Ethernet)
 - Bridge (Ethernet bridge)
 - Static IPv6 (Statically configured IPv6 over Ethernet)
 - IPv6 (Dynamically configured IPv6 over Ethernet)
 - IPv6 PPPoE (Dynamically configured IPv6 over PPP over Ethernet)
- ATM over DSL**
 - PPPoE (PPP over Ethernet over ATM)
 - DHCP (bridged) (DHCP-configured IPv4 over Ethernet over ATM)
 - Bridge (Ethernet bridge)
 - Static IPv4 (bridged) (Statically configured IPv4 over Ethernet over ATM)
 - PPPoA (PPP over ATM)
 - DHCP (routed) (DHCP-configured IPv4 over ATM)
 - Static IPv4 (routed) (Statically configured IPv4 over ATM)
 - Static IPv6 (bridged) (Statically configured IPv6 over Ethernet over ATM)
 - IPv6 (Dynamically configured IPv6 over Ethernet over ATM)
 - IPv6 PPPoE (Dynamically configured IPv6 over PPP over Ethernet over ATM)

Apply Reset

יש להקליד שם המשתמש והסיסמה שלנו. לסיום, יש ללחוץ על

Apply



0

PPP

Username:

Password:

MRU:

Maxfail:

Keepalive retry:

Keepalive interval:

Proxy ARP

Persist

On demand

Idle time:

Debug

Firewall

Firewall

NAT

Clamp TCP MSS to path MTU

DMZ host IP address:

Default routing

Confirmation: None

Required for HTTP traffic

Required for all traffic



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



הגדרות רשת אלחוטית :

שינוי שם לרשת אלחוטית :

1. יש לעבור אל חוצץ WIRELESS
2. יש לבחור מצד שמאל את האפשרות SSID list
3. יש להקליד את שם הרשת בשדה SSID
4. לסיום יש ללחוץ על Create

You are logged in as Admin. Sa

099.NET.IL

SETUP ADVANCED **WIRELESS** TOOLS STATUS STORAGE HELP

SSID list **Wireless**

PHY
Setup
AP list

The "Wireless" section lets you configure wireless related features.

Existing SSIDs

SSID	Enabled	Status	LAN group	Authentication	Delete
099.net.il	<input checked="" type="checkbox"/>	Online	lan0	MIXED_WPA_WPA2	<input type="checkbox"/>
RonenG	<input checked="" type="checkbox"/>	Online		WPA2	<input type="checkbox"/>

Apply Reset

New SSID

SSID:

LAN group:
lan0

Create Reset




Primo Telecommunication

072-2467000 | support@099.net.il | www.099.net.il

שינוי סיסמה לרשת אלחוטית:

1. יש ללחוץ מצד שמאל על Security
2. יש לבחור את סוג ההצפנה הרלוונטי
3. יש להקליד את הסיסמה הרצויה
4. לסיום, יש ללחוץ ע APPLY

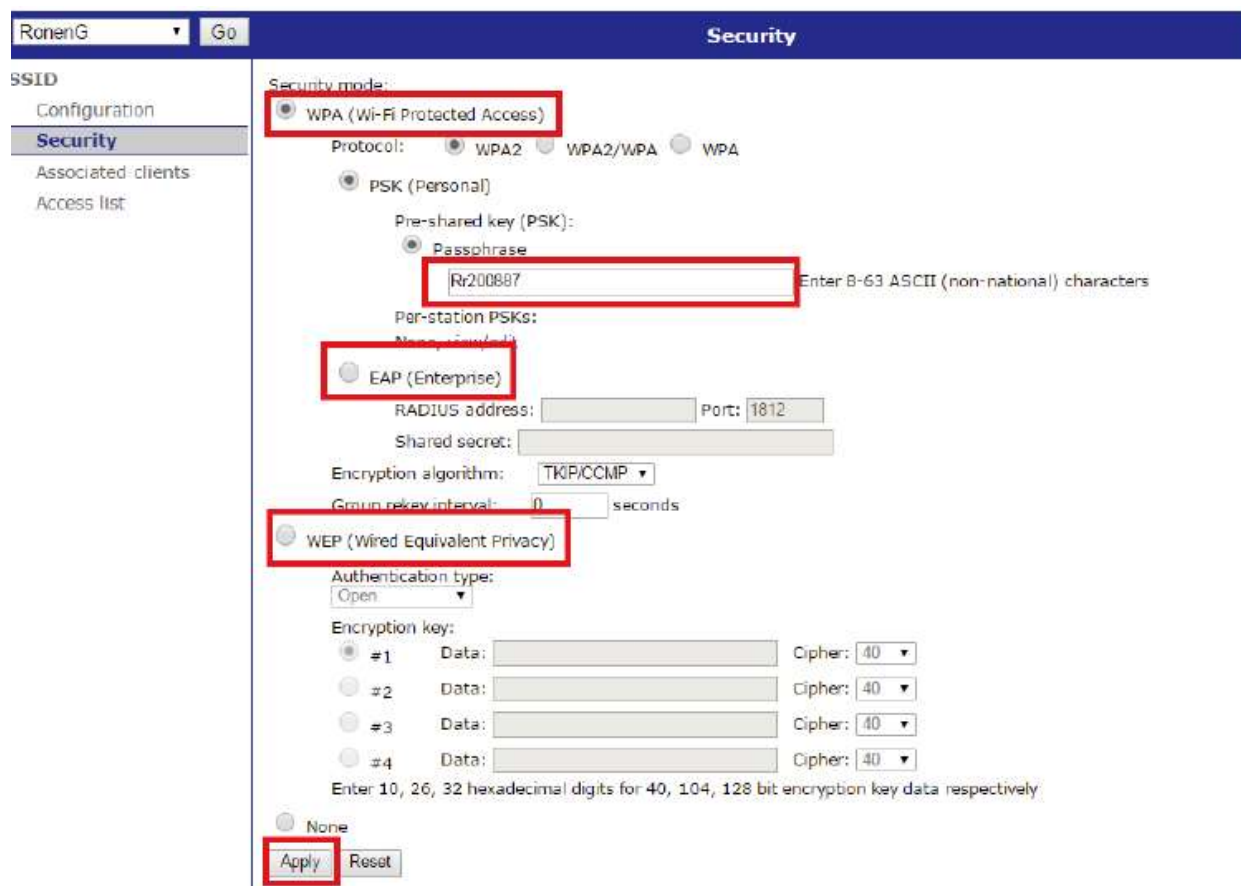

RonenG Go **Security**

SSID

- Configuration
- Security**
- Associated clients
- Access list

Security mode:

- WPA (Wi-Fi Protected Access)
- WPA2
- WPA2/WPA
- WPA

Protocol:

- PSK (Personal)
- EAP (Enterprise)
- WEP (Wired Equivalent Privacy)

Pre-shared key (PSK):

- Passphrase
- Hexadecimal

Rr200887 Enter 8-63 ASCII (non-national) characters

Per-station PSKs:

None specified

RADIUS address: Port: 1812

Shared secret:

Encryption algorithm: TKIP/CCMP

Group rekey interval: 0 seconds

Authentication type: Open

Encryption key:

- #1 Data: Cipher: 40
- #2 Data: Cipher: 40
- #3 Data: Cipher: 40
- #4 Data: Cipher: 40

Enter 10, 26, 32 hexadecimal digits for 40, 104, 128 bit encryption key data respectively

None