

Kasda-KW5212



Kasda



לקוח יקר על מנת להגדיר את הנתב שלכם יש לבצע את הצעדים הבאים :

1. יש לוודא שכל החיבורים מחוברים בצורה נכונה.
2. יש לוודא שהחיבור מהנתב למחשב התחבר בהצלחה
3. יש לפתוח את הדפדפן שלכם
4. יש לכתוב אצ הכתובת הבא

192.168.1.1

5. במסך ידרוש להזין שם משתמש וסיסמה

Username: admin

Password: adslroot

אז ללחוץ על OK

Address



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



Connect to 192.168.1.1

TD-W8961ND


User name:

Password:

Remember my password

OK Cancel

יש בלחוך על go to wizard setup בתפריט ואז ללחוך על apply

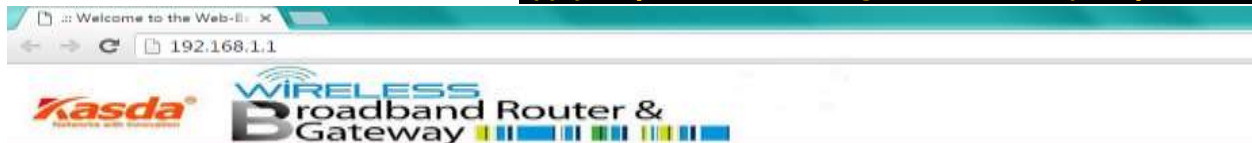

Please select Wizard or Advanced mode

The Wizard setup walks you through the most common configuration settings. We suggest you use this mode if it is the first time you are setting up your router or if you need to make basic configuration changes.

Use Advanced mode if you need access to more advanced features not included in Wizard mode.

- Go to Wizard setup
- Go to Advanced setup
- Click here to always start with the Advanced setup.

Apply Exit



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il



192.168.1.1



Internet Configuration

ISP Parameters for Internet Access

Please verify the following settings with your Internet Service Provider (ISP). Your ISP may have given you a welcome letter or a letter including this information.

Layer2 Interface Type:

Select the Layer2 Interface Type used by your ISP. Select ADSL will use ATM mode, Select VDSL will use PTM mode.

ADSL/VDSL over PTM

WAN service type:

Select the WAN service type used by your ISP.

PPPoE

Please enter the User Name and Password.

PPP Username:

username@099 שם משתמש

PPP Password:

password סיסמה

user@099

.....

Continue to Wireless Setup

Note:

Device is automatically configured to obtain an IP address automatically. The ISP will assign you a different one each time you connect to the Internet.

Yes

No

<Back

Next >

Exit

וואז NEXT

NEXT

כעת הנתב הותקן ומחובר לאינטרנט

הגדרות רשת אלחוטית

יש ללחוץ על wireless -

ואז יש מלבין מסומן ב SSID שם תוכלו לכתוב שם רשת אלחוטית שאתם רוצים



Primo Telecommunication

072-2467000 | support@099.net.il | www.099.net.il



Welcome to the Web-UI X
192.168.1.1



Wireless LAN

Wireless Parameters for Lan Access

Enable Wireless

Network Name(SSID)

Give your network a name. You will search for this name from your wireless clients.

099 Primo

שם רשת

Channel Selection:

Your router can use one of several channels. You should use the default channel unless other wireless networks nearby use the same channel.

Auto

Encryption:

Use this option if you would prefer to create your own key, WPA2-PSK is stronger than WEP but not all devices are compatible with WPA2-PSK.

Manually assign a WPA2-PSK key

Pre-Shared Key

WPA2-PSK Encryption: WPA Key should be between 8 and 63 ASCII characters or 64 hexadecimal digits.

0722467000

(example: 1234567890)

סיסמה

<Back Next > Exit

Welcome to the Web-UI X
192.168.1.1



CONGRATULATIONS

The Internet/Wireless Setup configuration is complete. Here are your current settings.

Internet Settings

Layer2 Interface Type:
WAN service type:
PPP Username:
PPP Password:

ADSL/VDSL over PTM
PPPoE
user@099
admin

Wireless LAN Settings

Network Name(SSID):
Channel Selection:
Encryption:
Network Key(WPA/WEP Key):

099 Primo
Auto
Manually assign a WPA2-PSK key
0722467000

Press "Apply/Save" button to finish this wizard configuration , or give up the config and click the following link to open other pages.

- 1. Return to Wizard Main Page
- 2. Go to Advanced Setup Page

<Back Apply/Save >

לשמור נתונים

כך הרשת האלחוטית שלכם והנתב מוגדרים בהצלחה



Primo Telecommunication

072-2467000 | support@099.net.i | www.099.net.il