



D-Link DSL 225- R1





לאחר כניסה אל הדפדפן יש להקליד את הכתובת הבאה

10.0.0.138



להכניס את השם המשתמש והסיסמה כמפורט:

Username: Admin

Password: Admin





בעמוד הבא יש להיכנס אל


Setup

בצד השמאלי ולהקליק על

Wan Service

בעמוד האמצעי ללחוץ על

PPPoE WAN

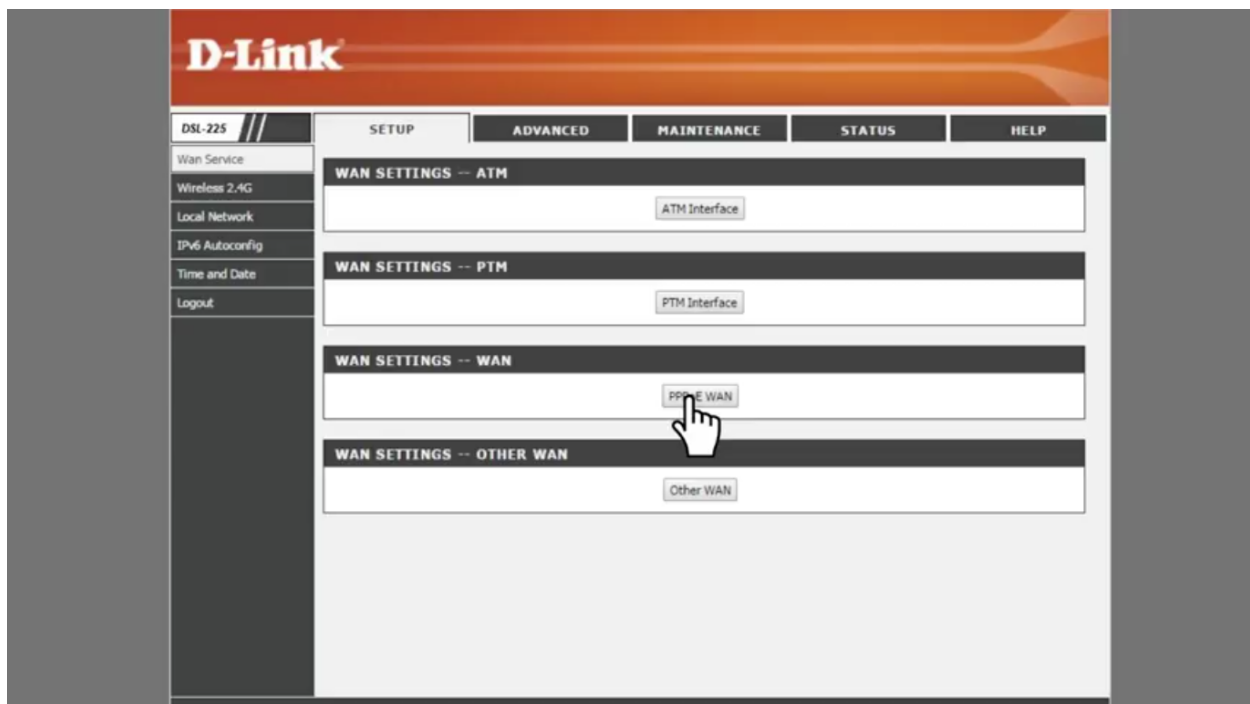



בעמוד החדש יש טבלה שבה יש עמוד service name צריך להסתכל על השורה שבה ה service name רשום: PPPoE_0_8_48
אחר כך משמאל, להקליק על

Edit

The screenshot shows the D-Link web interface for WAN Service Setup. The page title is "WAN SERVICE" and it includes instructions: "Choose Add, Remove or Edit to configure a WAN service over a selected interface." Below this is a table titled "WIDE AREA NETWORK (WAN) SERVICE SETUP".

| Service Name | Layer2 Interfaces | Icmp | NAT | Firewall | Remove | Edit |
|--------------|----------------------------|----------|---------|----------|--------------------------|-------------------------------------|
| PPPoE_0_8_48 | atm0/(0_8_48),ptm0/(0_1_1) | Disabled | Enabled | Enabled | <input type="checkbox"/> | <input type="button" value="Edit"/> |

Below the table are "Add" and "Remove" buttons.





יש להקיש את **שם המשתמש** עם הסיומת

@099

יש להקיש את **סימנת** ההתחברות

ולהקליק על

Next

The screenshot shows the configuration page for a DSL-225 device. The page has a navigation menu on the left with options like Wan Service, Wireless 2.4G, Local Network, IPv6 Autoconfig, Time and Date, and Logout. The main content area is titled 'PPP USERNAME AND PASSWORD' and includes a configuration section with the following fields and options:

- PPP Username:
- PPP Password:
- PPPoE Service Name:
- Authentication Method:
- Enable Fullcone NAT:
- Dial on demand (with idle timeout timer):
- PPP IP extension:
- Use Static IPv4 Address:
- Use Static IPv6 Address:
- Enable IPv6 Unnumbered Model:
- Launch Dhcp6c for Address Assignment (IANA):
- Launch Dhcp6c for Prefix Delegation (IAPD):
- Enable PPP Debug Mode:
- Bridge PPPoE Frames Between WAN and Local Ports:
- IGMP Multicast Proxy:
- Enable IGMP Multicast Source:
- Enable MLD Multicast Proxy:
- Enable MLD Multicast Source:
- NAT:
- Firewall:





להמשך ובסיום, יש ללחוץ

Apply/Save

L-225 //

SETUP ADVANCED MAINTENANCE STATUS HELP

WAN SETUP - SUMMARY

Make sure that the settings below match the settings provided by your ISP.
Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

SYSTEM INFO

| | |
|---------------------|----------|
| Connection Type: | PPPoE |
| NAT: | Enabled |
| Full Cone NAT: | Disabled |
| Firewall: | Enabled |
| IGMP Multicast: | Disabled |
| Quality Of Service: | Disabled |

Back Apply/Save

